



Miscellaneous models

Game of Life: Cellular Automata

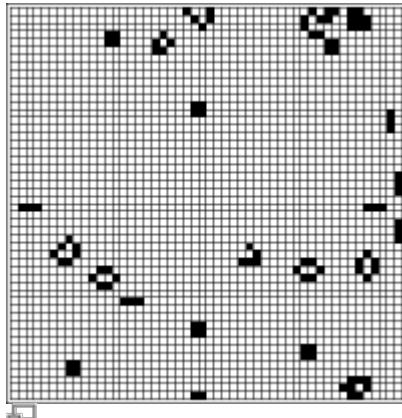

Conway's Game of Life

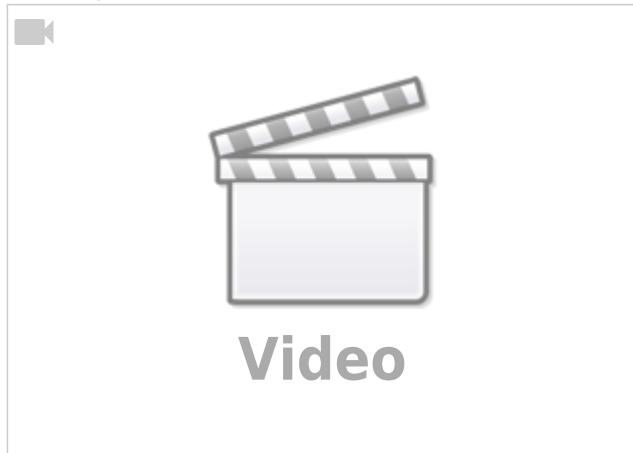

Introduction

This example models probably the best-known classic cellular automaton (CA) model: Conway's Game of Life.

It shows an alternative use of `System` for synchronous updating of `Equations`.

Model description

In this model, the lattice is filled with cells of size 1. Each cell counts the number of neighboring cells that are 'alive' and acts accordingly. The rules that make up the Game of Life are implemented in a `System` of `Equations` in which all `Equations` are updated synchronously.

Things to try

- Change the Neighborhood from a Moore (2nd order) to von Neumann (1st order).


Model

h GameOfLife.xml |h

```
extern>http://imc.zih.tu-dresden.de/morpheus/examples/Miscellaneous/GameOfLife.xml
```

In Morpheus GUI: Examples → Miscellaneous → GameOfLife.xml

French Flag: Morphogen gradient

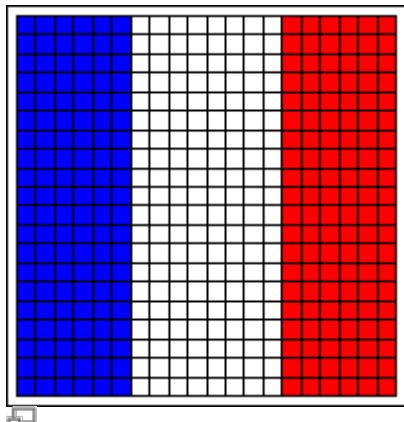

Wolpert's French Flag

Introduction

This example shows Wolpert's classical French Flag model. Depending on the local concentration of a morphogen, cells adopt one of three cell types based on internal thresholds.

Model description

The model sets up a morphogen gradient in the x direction PDE. Note that no diffusion is used, since we use the steady-state solution of diffusion.

The cells in CellType register the (average) local morphogen concentration using PDEReporter. Based on the specified threshold values, they choose an identity I as defined in the Equation.

Note that this model is not time-dependent. Time is therefore set from StartTime 0 to StopTime 0.

Things to try

- Change the physical length of the domain by editing Space → NodeLength that controls the physical size per lattice site.

- Change the model such that the morphogen gradient is set up by production and diffusion, using Diffusion and a System with DiffEqn. That is, change the model into a time-dependent model.


Model

h FrenchFlag.xml |h

```
extern>http://imc.zih.tu-dresden.de/morpheus/examples/Miscellaneous/FrenchFlag.xml
```

In Morpheus GUI: Examples → Miscellaneous → FrenchFlag.xml.

Particle Aggregation: FlipCells

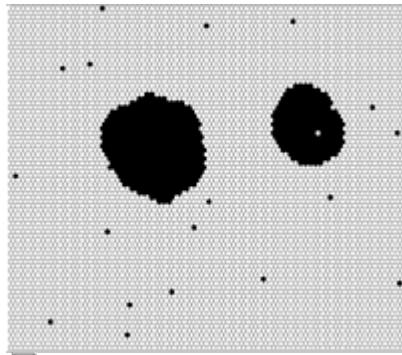

Aggregation of moving particles



Introduction

This models approximates an interacting particle system (IPS) model of particle aggregation. Each black dot represents a particle that moved due to spin flips with random neighbors. The particles perform random walks in which the probability of moving depends on the number of neighboring cells.

Model description

Each lattice site (white or black) counts the number of particles (black neighboring sites) using a **NeighborsReporter**.

The probability of movement of each particle is made dependent on its number of neighbors by using it in the **Condition of FlipCells**. When this condition is satisfied, the particle changes positions with a random neighboring lattice site.

A **PopulationReporter** is used to return the fraction of isolated black particles. This number is logged and plotted using the **Logger**.

Things to try

- Change the parameter p .

Model

h ParticleAggregation.xml |h

```
extern>http://imc.zih.tu-dresden.de/morpheus/examples/Miscellaneous/Particle
Aggregation.xml
```

In Morpheus GUI: Examples → Miscellaneous → ParticleAggregation.xml

From:
<https://imc.zih.tu-dresden.de/wiki/morpheus/> - **Morpheus**

Permanent link:
<https://imc.zih.tu-dresden.de/wiki/morpheus/doku.php?id=examples:miscellaneous&rev=1629300968>

Last update: **17:36 18.08.2021**

